



[KIV-102 / D102]


- 4" CRT B/W Handsfree VDP
- For single house & multi apartment, condominium & villa system (upto 450 houses) are available
- Up to 5 indoor units (4 monitor & 1 audio handset, KIP-603) and 2 front door cameras connection
- Internal call & conversation function between extended indoor units in a house
- Audio + video conversation with visitor
- Door open (front door & common gate) function
- Call & conversation function with guard master
- Monitoring function from front door camera & common gate camera (KLP-100, KLP-P100)
- Upto 3pcs of common gate cameras connection in a building
- KIV-102 : AC Type, KIV-D102 : DC type

Specifications

Model no.	KIV-102	KIV-D102
Power	Trans AC220V ± 10%	DC17V / AC24V (Dual voltage)
Power consumption	Max. 15W, Stand by 1W	
Assurance temperature	0°C ~ +50°C	
Communication systems	Two way hands free conversation	
CRT	4" Flat ture	
Wiring	4wires (front door camera), 6wires (common gate camera)	
Max. wiring distance	Ø0.65 single cable : 50m, 5C-2V coaxial cable : 100m (front door camera)	
Mount type	Surface mount	
Dimension (mm)	190(W) x 216(H) x 51(D)	
Camera connection	Front door camera	KC-C63 (angle adjustment), KC-D30 (metal pinhole)
	Common gate camera	KLP-100, KLP-104, KLP-108, KLP-112 KLP-P100, KLP-P104, KLP-P108, KLP-P112

• The product may include option or additional functions.

Diagram

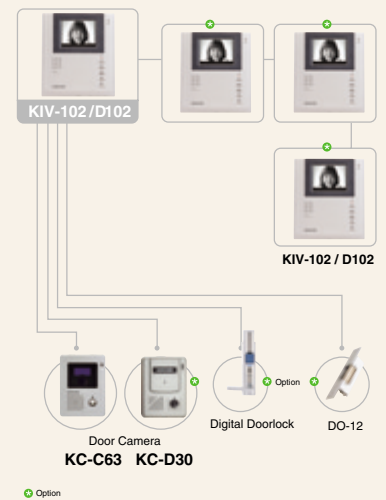

[Multi-entry Type Configuration]

